
IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-NTSS -



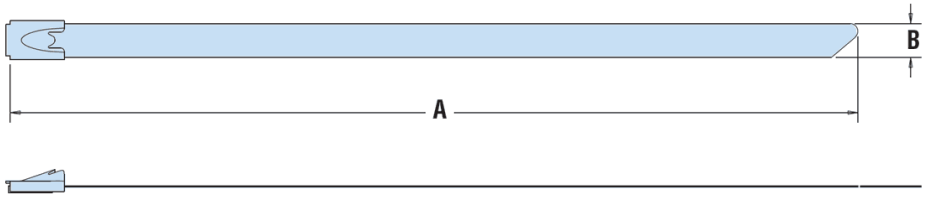

Details:

- **Material: AISI 304 or 316 stainless steel with PVC coating**
- For ease of assembly, position locking head so the widest end is down.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available on special order.
- Standard pack: 100 pcs

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	Material	Coating
	[daN]	[mm]	[mm]	[mm]		
H-12884B	111.5	240	800	7.9	stainless steel 316	black PVC