


TU-FEU-PG - Metal cable glands, ATEX, PG thread

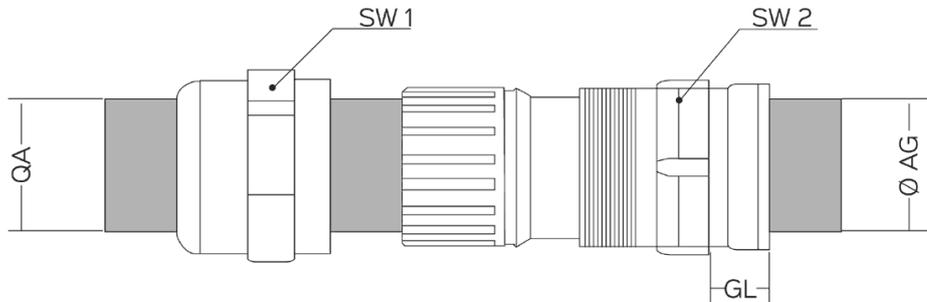

Details:

- **Body material: nickel-plated brass**
- Other available body materials: brass, stainless steel, aluminium
- **Seal material: NBR**, working temperature: -30°C to 120°C
- Other available seal material:
 - TPV - working temperature: -30°C to 120°C
 - Neoprene - working temperature: -40°C to 100°C
 - Silicone - temperatura pracy: -60°C to 180°C
- Thread: PG (DIN 40430)
- Certificates: IEP 17 ATEX 0516X, RoHS
- Application: Zone 1, Zone 2, Zone 21, Zone 22

Symbol	PG thread ØAG	Cable diameter range QA	Protection D GL min.	Protection E GL min.	Wrench size SW1	Wrench size SW2	Standard pack	Material
		[mm]	[mm]	[mm]	[mm]	[mm]		
TU-FEU-P42NBBN	PG42	30.0 - 38.0	22	14	58	58	12	brass, nickel plated